
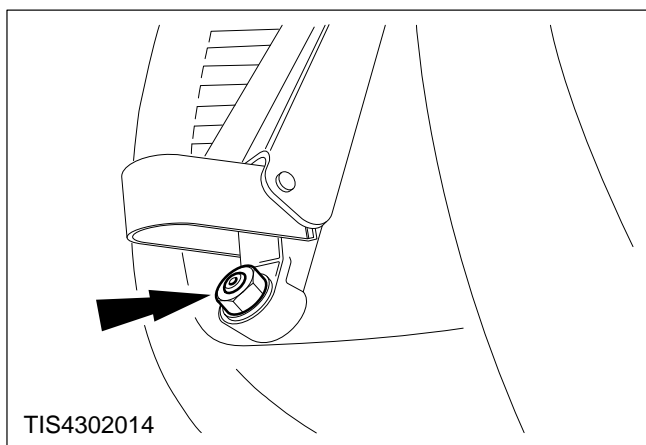


Grille Assembly – Cowl Top Outer – Remove and Install (43 230 0)


Remove

1. Remove the wiper arms.
2. Open the hood.

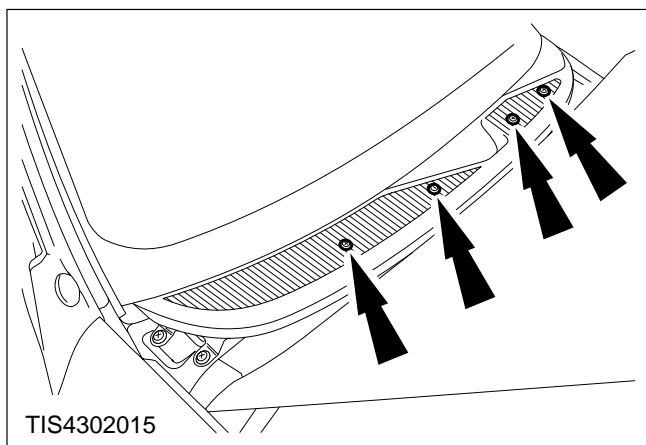

3. Remove the top fixing screws.

Pull off the screw covers.

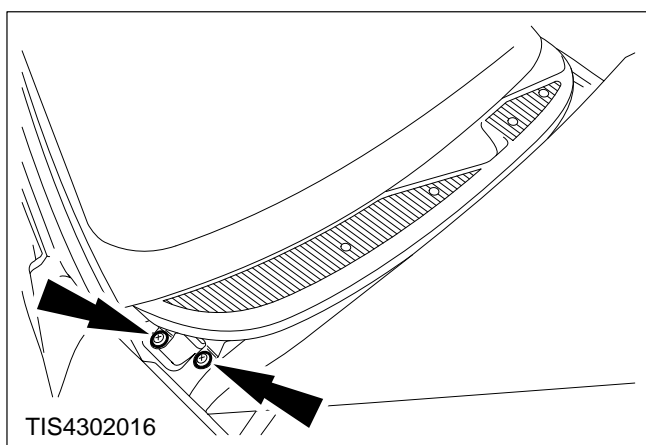

4. Remove the grille assembly.

Two screws each side.

Install

- 5. Refit the components in reverse order.**