

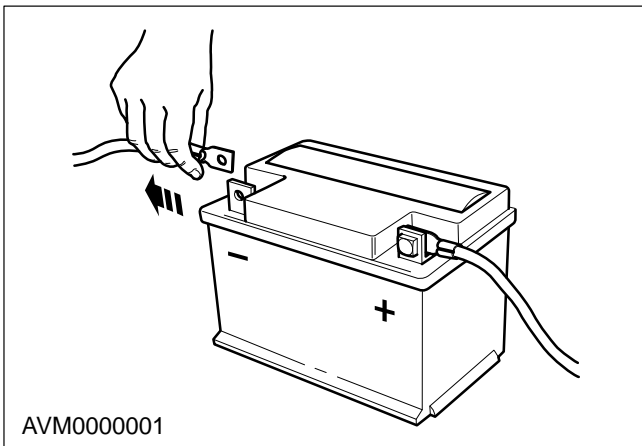


Sensor – Park Position (Notchback) – Remove and Install (33 369 0)**Remove**


1. Disconnect the battery negative lead.
2. Remove the right-hand load space trim panel (refer to Operation Number 43 746 0).

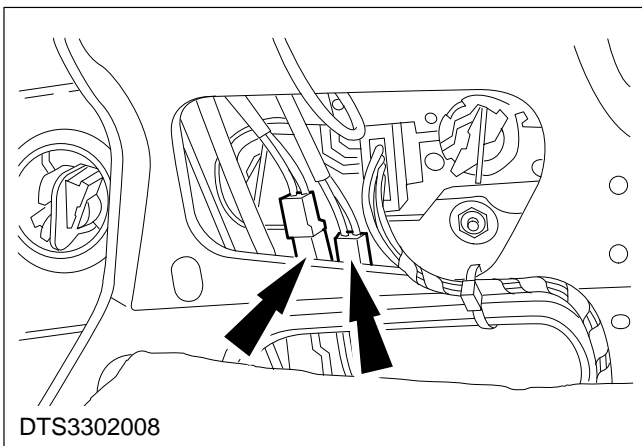


3. Disconnect the sensor multiplugs.
4. Remove the rear bumper (refer to Operation Number 43 468 0).

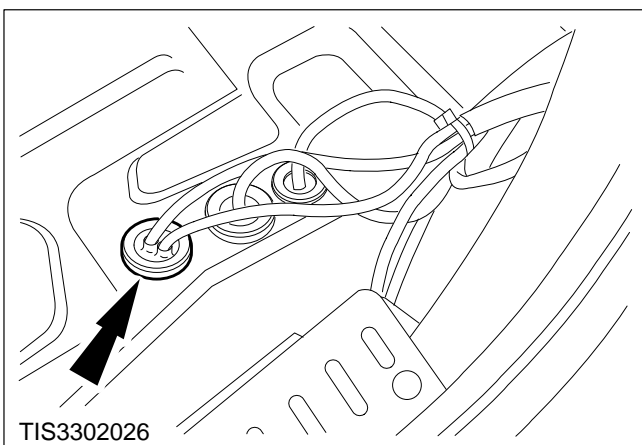

5. Gently pull the sensor cables and multiplugs through the grommet in the luggage compartment floor.

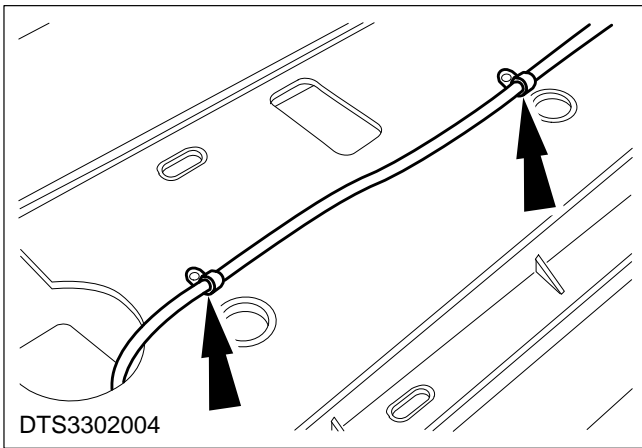

6. Remove the cable clips.

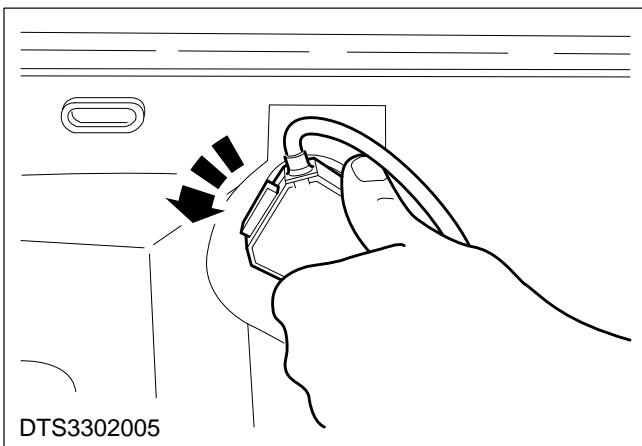

7. Remove the sensor.

Turn anti-clockwise to release.

Install

8. Refit the components in reverse order.