
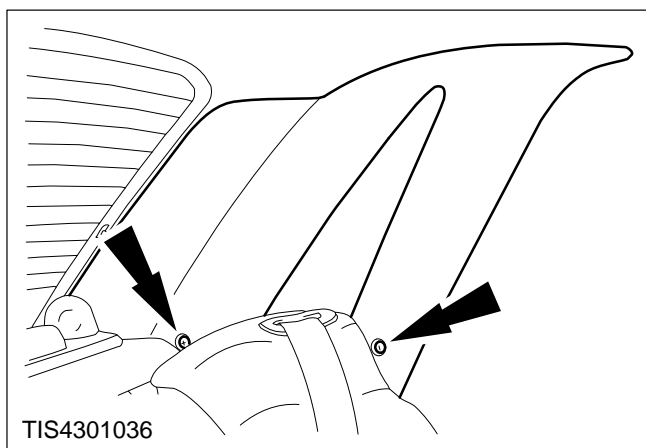


C – Pillar Trim – Remove and Install (43 618 0)**Remove**

- 1. Remove the two lower securing screws.**

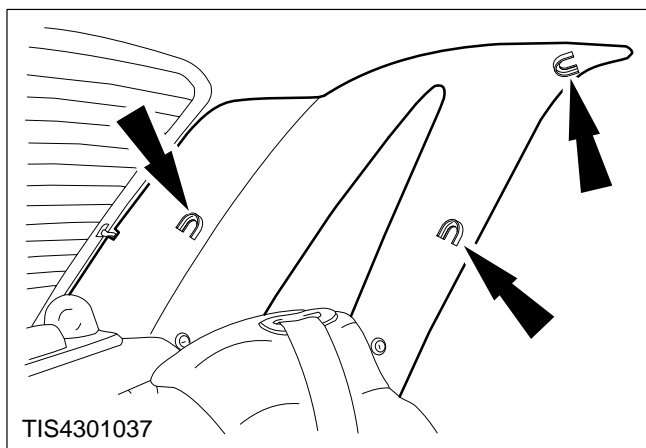

- 2. Unclip and remove the C – pillar trim.**

Install

- 3. Refit the components in reverse order.**